ECONOMYARM

FLEXIBLE EXTRACTION ARM

Hose tube arm with spring balanced support mechanism. The hood has a safety mesh and a shut-off damper damper. The arm is 360° rotatable.

The EconomyArm arm is available in two different types:

- type **H**: for hanging mounting (wall bracket included)
- type **S**: for standing mounting (e.g. on a mobile unit)



APPLICATIONS

The EconomyArm is intended to be used for the following applications:

Physical dimensions and properties




- MIG-MAG/GMAW welding
- TIG welding
- FCAW welding
- stick/MMAW welding

SPECIFICATIONS

= Filysical ullilelisions	and properties					
Diameter: • tubes • hood opening	• Ø 160 mm (6.3 in.) • Ø 300 mm (11.8 in.)					
Material of hose	flame-retardant PVC, reinforced with spring steel wire					
Colour	black					
■ Performance						
Recommended airflow	800-1200 m ³ /h (470-710 cfm)					
■ Ambient and process conditions						
Process temperature: • min. • nom. • max.	• 5°C (41°F) • 20°C (68°F) • 70°C (158°F)					
Max. relative humidity	90%					
Outdoor use allowed	no					
Storage conditions	• 5-45°C (41-113°F) • relative humidity max. 90%					
Options and accessor	ies					
S-100	manual on/off switch for hood mounting					
LL-5.5/24-160	manual on/off switch, incl. working light (LED)					
■ Product combinations	5					
EA-2/H EA-3/H EA-4	/Н					
FUA-1800 FUA-2100	extraction fan					
FM-15 FM-25 FM-35 FM-45	extension crane					
ERC	extraction rail					
PA-110 PA-220	stanchion					

SLE-30 extension hose EA-2/S EA-3/S EA-4/S MobilePro mobile fume extractor Scope of supply H types: hose tube arm (in parts) – Wall bracket S types: hose tube arm (in parts) Order information Number/package 1 Shipping data Harmonized Tariff Code 84219990						
MobilePro mobile fume extractor Scope of supply H types: hose tube arm (in parts) – Wall bracket S types: hose tube arm (in parts) Order information Number/package Shipping data	SLE-30	extension hose				
■ Scope of supply • H types: hose tube arm (in parts) – Wall bracket • S types: hose tube arm (in parts) ■ Order information Number/package 1 ■ Shipping data	EA-2/S EA-3/S EA-4/S					
 H types: hose tube arm (in parts) - Wall bracket S types: hose tube arm (in parts) Order information Number/package Shipping data 	MobilePro	mobile fume extractor				
• S types: hose tube arm (in parts) Order information Number/package Shipping data	■ Scope of supply					
Number/package 1 Shipping data	, , ,					
■ Shipping data	■ Order information					
	Number/package	1				
Harmonized Tariff Code 84219990	■ Shipping data					
	Harmonized Tariff Code	84219990				

MOUNTING POSSIBILITIES

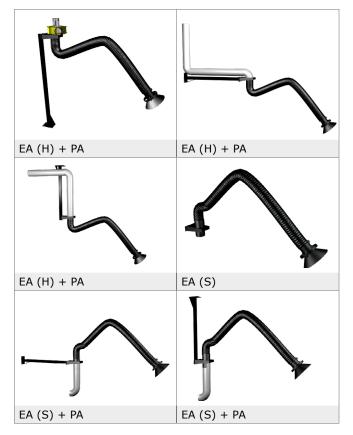





clean air at work

Remaining specifications

	E4 2/11	E4 2/6	E4 2/11	EA 2/6	EA 4/11	EA 4/6					
	EA-2/H	EA-2/S	EA-3/H	EA-3/S	EA-4/H	EA-4/S					
Physical di	■ Physical dimensions and properties										
Length	2 m (6.6 ft)	2 m (6.6 ft)	3 m (9.8 ft)	3 m (9.8 ft)	4 m (13.1 ft)	4 m (13.1 ft)					
Weight (net)	17,5 kg (39 lbs.)	14,5 kg (32 lbs.)	21 kg (46 lbs.)	16,5 kg (36 lbs.)	23 kg (51 lbs.)	20 kg (44 lbs.)					
Order info	Order information										
Art. no.	0000101141	0000111793	0000101143	0000101149	0000101146	0000101151					
Shipping d	Shipping data										
Gross weight	18,5 kg (41 lbs.)	15 kg (33 lbs.)	22 kg (49 lbs.)	17,5 kg (39 lbs.)	24 kg (53 lbs.)	21 kg (46 lbs.)					
Packing dimensions	1200 x 300 x 400 mm (47.2 11.8 x 15.7 in.)	1600 x 300 x 500 mm (63 x 11.8 x 19.7 in.)		2100 x 300 x 500 mm (82.7 x 11.8 x 19.7 in.)		2270 x 300 x 500 mm (89.4 x 11.8 x 19.7 in.					

PRESSURE DROP





FEATURES & BENEFITS





Product type EΑ

refer to Order information Product category

Always check the latest version on $\boldsymbol{www.plymovent.com}$