MOBILEGO plus

MOBILE FILTER UNIT WITH METAL TUBE ARM

The MobileGo^{plus} is a mobile welding fume filter with built-in fan and a metal tube arm (KUA). It contains a disposable filter package.

Thanks to the four transport wheels (two of which are swivel casters with brake), the MobileGoplus is suitable for use in relatively small facilities or near sources of pollution without a fixed location.

The MobileGo^{plus} is a basic extractor. It has been designed for the consumption of approx. 2 coils of solid wire or 15 kg/33 lbs of electrodes per month.



APPLICATIONS

The MobileGo^{plus} is intended to be used for the following applications:

- MIG-MAG/GMAW welding
- TIG welding
- FCAW welding
- stick/MMAW welding
- grinding
- polishing
- finishing

SPECIFICATIONS

■ Physical dimensions and properties			
Material (housing):	electro-zinc coated steel (according to DIN EN 10152)		
steel grade	• DC01+ZE		
• steel grade no.	• 1.0330		
Colour	yellow RAL 1004 grey RAL 7011		
Weight (net), excl. arm	85,5 kg (188.5 lbs)		
Mains cord:			
• type	• 3G1.5		
length	• 6 m (20 ft)		
Extraction arm			
Туре	KUA		
Material	metal tube		
Diameter	Ø 160 mm (6.3 in.)		
Hood opening	Ø 300 mm (11.8 in.)		
Length:			
• KUA-2	• 2 m (6.6 ft)		
• KUA-3	• 3 m (9.8 ft)		
Weight:			
• KUA-2	• 12 kg (26.5 lbs)		
• KUA-3	• 15.5 kg (34.2 lbs)		
Filters			
Pre filter cassette:			
material	• polyester		
filter surface	• 1 m ² (10.8 ft ²)		
• filter class	G4 according to EN 779		
• washable	• no		
HEPA filter cassette:			
material	• glass fibre		
filter surface	• 26 m² (280 ft²)		
filter class	HEPA E12 according to		

EN 1822:2009



• washable	• no		
■ Welding fume class			
W3	according to ISO 15012-1:2013		
■ Performance			
Fan type	radial		
Extraction capacity (incl. extraction arm)	max. 850 m³/h (500 CFM)		
Fan speed	2800 rpm		
Noise level (according to ISO 3746)	67 dB(A)		
■ Electrical data			
Power consumption	1,1 kW (1.5 HP)		
Available connection voltages	• 115V/1ph/50Hz (115) • 115V/1ph/60Hz (116) • 230V/1ph/50Hz (215)		
Motor design	IEC		
Energy efficiency	n.a. for single phase motors		
Plug: • 115V/1ph/50Hz • 115V/1ph/60Hz • 230V/1ph/50Hz	Type: • none • none • F		
■ Ambient and process	conditions		
Process temperature:	• 5°C (41°F) • 20°C (68°F) • 70°C (158°F)		
Max. relative humidity	90%		
Suitable for outdoor use	no		
Storage conditions	• 5-45°C (41-113°F) • relative humidity max. 80%		
	-		
■ Scope of supply			

Mobile filter unit – Extraction arm (pre-assembled) – Rotating flange – Arm swivel ring, incl. rubber collar – Extraction hood – Hood collar with safety mesh –


Mounting material




clean air at work

Туре	MobileGo ^{plus} /2m			MobileGo ^{plus} /3m		
Connection voltage	115V/1ph/50Hz	115V/1ph/60Hz	230V/1ph/50Hz	115V/1ph/50Hz	115V/1ph/60Hz	230V/1ph/50Hz
■ Order information						
Article no.	0000111453	0000111454	0000111452	0000111474	0000111475	0000111473
•						
Number/package	1	1	1	1	1	1
■ Logistics data						
Gross weight						
Packing dimensions						
Max. number/pallet	2			2		
Harmonized Tariff Code	84213925			84213925		

DIMENSIONS

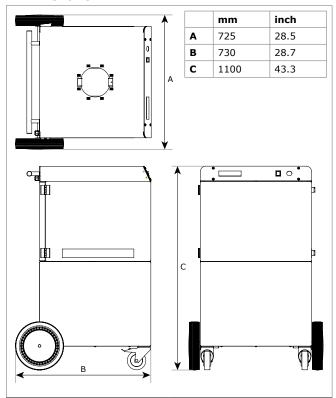

WORKING RANGE



FEATURES & BENEFITS



Compact design



Simple control | Service indicator (buzzer) monitors the airflow



clean air at work

APPROVALS/CERTIFICATES

CE	
K oHS	Directive 2011/65/EC (RoHS) valid as of 8 June 2011

Application restrictions

Do not use the product for the following applications or in the following circumstances: polishing applications in combination with grinding, welding or any other application that generate sparks (fibres from polishing or abrasive flap disks are highly flammable and pose a high risk of filter fires when exposed to sparks) | aluminium laser cutting | oil mist | heavy oil mist in welding fume | arc-air gouging | extraction of aggressive fumes and gases (e.g. from acids, from alkaline, from soldering paste containing lithium) | extraction of hot gases (more than 70°C/158°F continuously) | grinding aluminum and magnesium | flame spraying | extraction of cement, saw dust, wood dust etc. | sucking cigarettes, cigars, oiled tissues and other burning particles, objects and acids | explosive environments or explosive substances/gases

Product type **MobileGo**^{plus}

Article no. refer to Order information

Product category mobile filter units

rsion 280917/

Always check the latest version on www.plymovent.com