

AIRJET

STANDALONE AIR CLEANER

Engineered for demanding environments, this standalone industrial air cleaner delivers powerful air purification for fire stations, factories, workshops, and warehouses. With a high-capacity multi-stage filtration system it effectively removes dust, smoke, fumes, and airborne contaminants. With three different filter options to select from - including HEPA or activated carbon - the AirJet can be tailored to your specific air quality needs. The unit can be rotated 180 degrees to quickly reverse airflow direction, offering flexible installation and improved adaptability to changing workspace needs. Equipped with a stepless EC motor (short for Electronically Commutated motor): a brushless DC motor with integrated electronics that control the operation speed. Designed for continuous operation, it features a rugged steel housing, low-maintenance components, and simple controls. Improve air quality, protect equipment, and ensure worker safety—all with one compact, plug-and-play solution.



APPLICATIONS

The AirJet is intended to be used for the following applications:



- To eliminate hazardous vehicle exhaust emissions in the following segments: fire and emergency service stations as well as military facilities, industrial and environmental air cleaning and logistic warehouses (dust capturing).

Residual air cleaning

- MIG-MAG/GMAW welding
- TIG/Stainless steel welding
- FCAW welding
- Stick/MMAW welding

SPECIFICATIONS

Physical properties

Material	body	full steel
Color	black RAL 9005	yellow RAL 1004
Dimensions (L×W×H)	1683 x 717 x 754 mm	
Net weight	136 kg (without filters)	

Filter (to be ordered pending application)

Pre filter (cassette)	material	filter surface	filter classification	washable
	polyester	1 m ²	G4 ISO Coarse 70% according to ISO 16890	no
HEPA filter (cassette)	material	filter surface	efficiency class	washable
	glass fibre	15 m ²	E12 according to EN 1822-1:2009	no
HEPA filter (cassette)	material	filter surface	efficiency class	washable
	glass fibre	26 m ²	E12 according to EN 1822-1:2009	no
Post filter (cassette)	material	filter surface	filter classification	washable
	polyester	1 m ²	G4 ISO Coarse 70% according to ISO 16890	no

Activated carbon (cassette)

- type of carbon
- carbon content
- moisture content, as packed
- bed density
- carbon tetrachloride activity
- butane activity
- iodine number
- hardness
- pellet diameter
- washable
- coal based extruded
- 15 kg
- max. 5%
- 450 kg/m³
- min. 60% w/w
- min. 23% w/w
- 1000 mg/g
- 90%
- Ø 3 mm
- no

Performance

Max. extraction capacity*	7500 m ³ /h
Max. static pressure	1030 Pa
Noise level @ max. speed	< 70 dB(A)

Electrical data (motor)

Power consumption	700 W
Available connection voltages	176 - 264 VAC
Frequency	50/60 Hz
Speed	1450 rpm
Current @ full speed	3.1 A
Protection class	IP55
Insulation class	Class F

Ambient conditions

Operating conditions	-25 - 60°C Relative humidity max. 90%
Storage conditions	-25 - 60°C Relative humidity max. 90%
Suitable for outdoor use	No

Scope of supply

AirJet (filters to be ordered separately)

Order information

Article number:	
AirJet	0000351370
Pre- and post filter	0000111637
HEPA filter cassette (E12) 15 m ²	0000111628
HEPA filter cassette (E12) 26 m ²	0000111636
Carbon filter cassette	0000112427
Number/package	1


Shipping data

Gross weight (inc. pallet)	143 kg
----------------------------	--------


* Actual airflow depends on applied filterset combination

Packing dimensions (inc. pallet)	1600 x 800 x 900 mm
Max. number per pallet	1
Country of origin	Thailand
Harmonized Tariff Code	84213925

DIMENSIONS

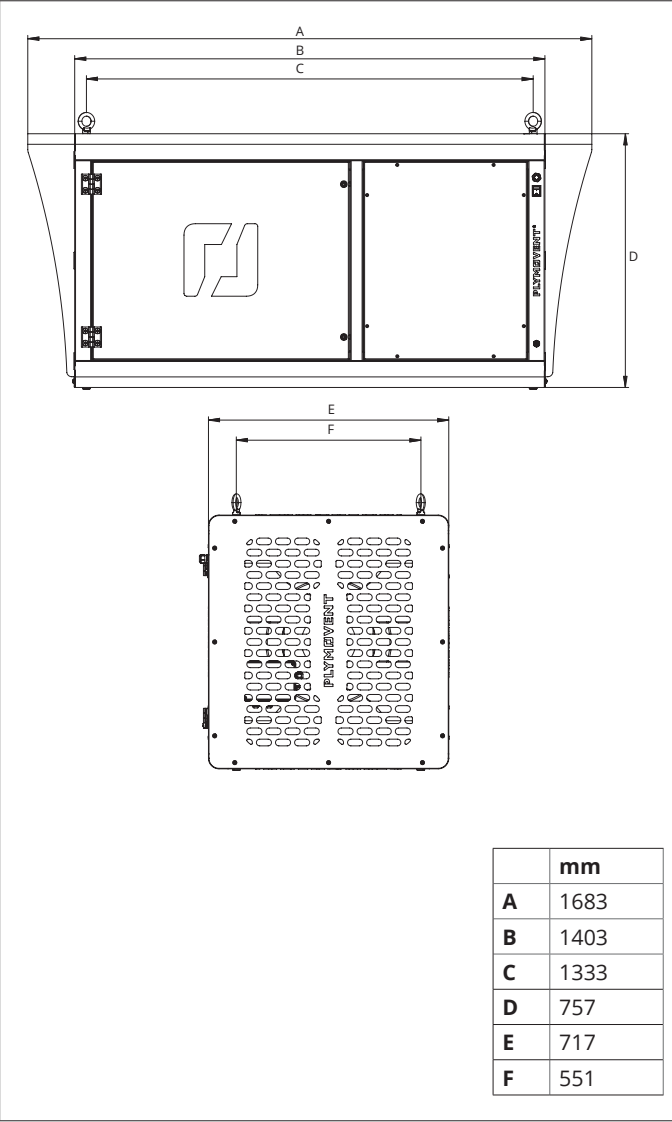

FEATURES & BENEFITS

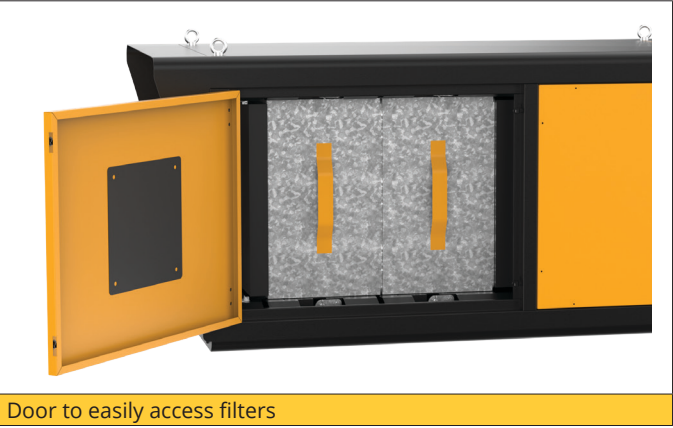

APPROVALS & CERTIFICATES

CE Machine Directive 2006/42/EU / UKCA Supply of Machinery (Safety) Regulations 2008



Application restrictions

Do **not** use the product for the following applications or in the following circumstances: polishing applications in combination with grinding, welding or any other application that generate sparks (fibers from polishing or abrasive flap disks are highly flammable and pose a high risk of filter fires when exposed to sparks) | aluminum laser cutting | oil mist | heavy oil mist in welding fume | arc-air gouging | extraction of aggressive fumes and gases (e.g. from acids, from alkaline, from soldering paste containing lithium) | extraction of hot gases (more than 70°C (158°F) continuously) | grinding aluminum and magnesium | flame spraying | extraction of cement, saw dust, wood dust etc. | sucking cigarettes, cigars, oiled tissues and other burning particles, objects and acids | explosive environments or explosive substances/gases

Disclaimer

All reasonable measures have been taken to ensure the information is accurate and current. However, Plymovent cannot accept any liability for the accuracy or content of material in this document. Plymovent may change, delete or add information without notice. Please visit www.plymovent.com to make sure you are using the most recent version.

Product	AirJet
Article no.	Refer to order information
Product category	Mobile filters
Version	A
Always check the latest version on www.plymovent.com	